

HIS-Battery Tester

High -
Reliability / Efficiency / Power factor / Power density

HIS-BT1020

- 원격 제어 소프트웨어
- 터치 스크린 디스플레이
- 다양한 어플리케이션에 적용 가능
- 비상 차단 스위치




항목		사양	비고
		20kW	
		BT1020	
AC Input specification	Input voltage	3φ4W	
	Gride frequency	60Hz	Rated
	Power factor	94% over	
DC Output	Voltage	30Vdc ~ 100Vdc	
	Current	0 ~ 200A	
Environment	Operating Temperature	0 ~ 40 °C	
	Storage Temperature	0 ~ 40 °C	
	Relative Humidity	20 ~ 80 %, No condensation	
	IP	IP20	
Alarming and Protection	Alarming and Protection	Automatically recovers after a shutdown restart	
	Over / under input voltage	Automatically recovers after a shutdown restart	
	Over current and short circuit	Automatically recovers after a shutdown restart	
	Over temperature	Automatically recovers after a shutdown restart	
ETC	Cooling	Forced Cooling Fan	
	Display	7" Touch Screen	
	Interface	CAN 2.0	
	Dimension(W*D*H)	600*845*1,800mm (T.B.D)	커넥터 제외
	Weight	T.B.D	


HIS-Battery Tester

High -
Reliability / Efficiency / Power factor / Power density

HIS-BT1020

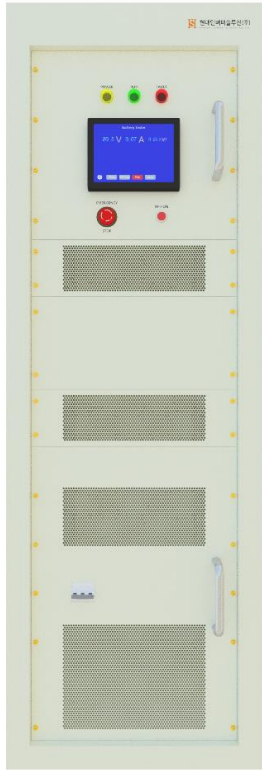

FRONT

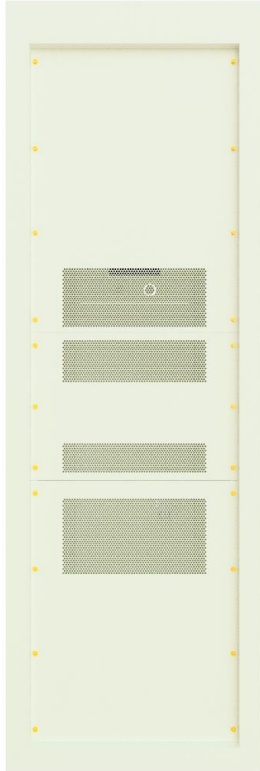



REAR



RIGHT



LEFT

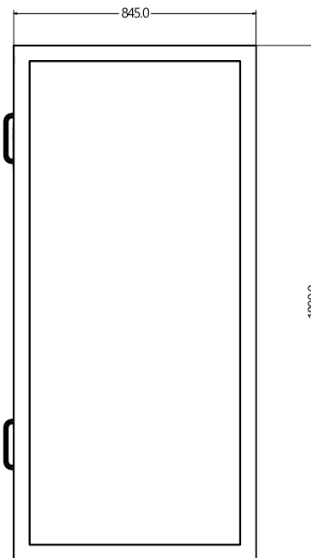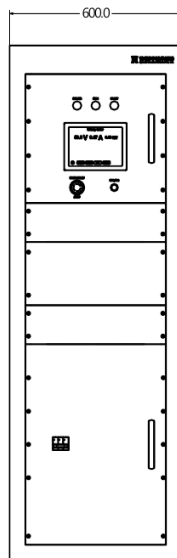

SIZE