

HIS-POWER CHARGER

High -
Reliability / Efficiency / Power factor / Power density

HIS-C500
HIS-C750

- 넓은 충전 전압 범위
- 사용 온도 범위 -30 °C ~ 60°C
- 낮은 소비전력
- Touch screen으로 간편하게 조작 가능



항목		사양						비고	
		C500		C750					
		C500-30	C500-40	C750-20	C750-20H	C750-30	C750-30H		
AC Input specification	Input voltage	380Vac ± 10%, 3 phase, PE							
	Input current	<40A							
	Gride frequency	60Hz						Rated	
	Power factor	98% over							
	Current THD	<5%							
DC Output	Voltage		50Vdc~500Vdc		50Vdc~750Vdc				
	Current	Rated	26A	40A	20A	20A	26A	28A	
		Max	35A	55A	25A	38A	38A	50A	
Environment	Operating Temperature	-30 ~ +60 °C							
	Storage Temperature	-40 ~ +75 °C							
	Relative Humidity	95 % under, No condensation							
	IP	IP20							
Alarming and Protection	Alarming and Protection	Automatically recovers after a shutdown restart							
	Over / under input voltage	Recovers by hand after a shutdown							
	Over current, short circuit	Recovers by hand after a shutdown							
	Over temperature	Automatically recovers after a shutdown restart							
ETC	Cooling	Forced Cooling Fan							
	Display	4" Touch Screen							
	Interface	CAN 2.0							
	Dimension(W*D*H)	500* 435* 265.9mm						커넥터 제외	
	Weight	T.B.D							

※ 동일 전압 범위에서 대용량 충전기 주문 제작

IS 현대인버터솔루션(주)
Hyundai Inverter Solution Co. Ltd.

HYUNDAI INVERTER SOLUTION

(우44781) 울산광역시 남구 신여천로 35번길 46(여천동)

☎ 070.4439.1567

☎ 052.209.2697


✉ bluecat910227@naver.com

HIS-POWER CHARGER


High -
Reliability / Efficiency / Power factor / Power density

HIS-C500
HIS-C750


C500-30-Output Voltage VS. Output Current

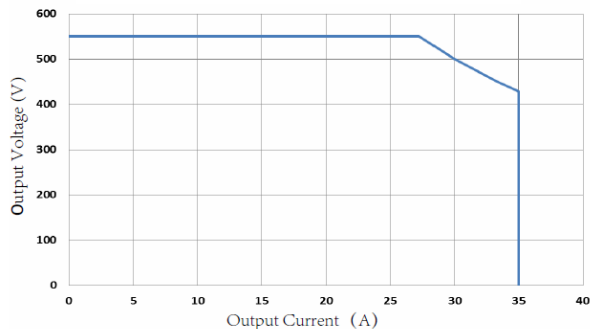


C750-20-Output Voltage VS. Output Current

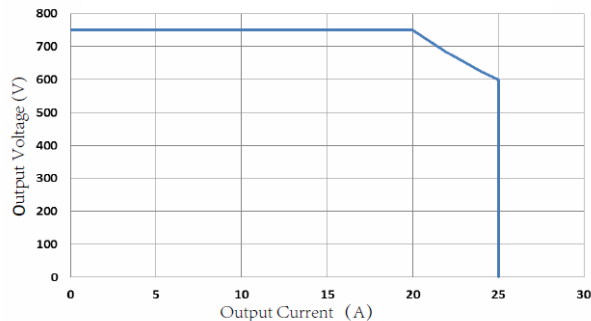


C750-20H-Output Voltage VS. Output Current

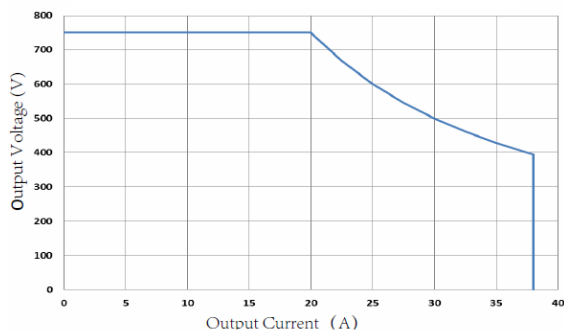


C500-40-Output Voltage VS. Output Current

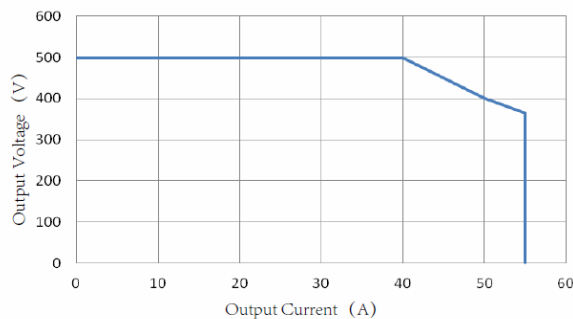

C750-30-Output Voltage VS. Output Current

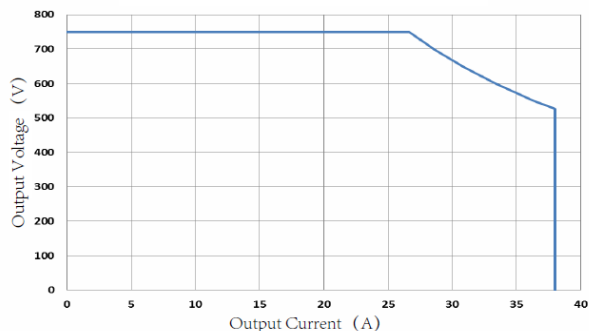


C750-30H-Output Voltage VS. Output Current

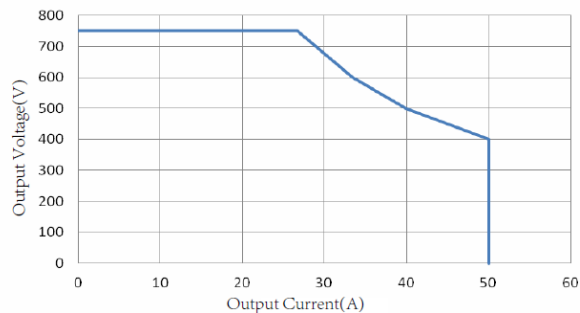


HIS-POWER CHARGER

High -
Reliability / Efficiency / Power factor / Power density


HIS-C500
HIS-C750

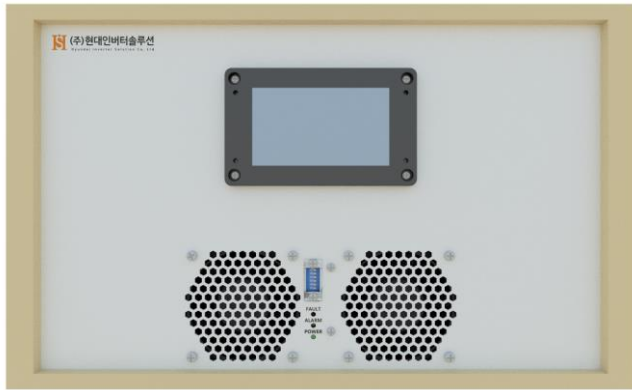


FRONT

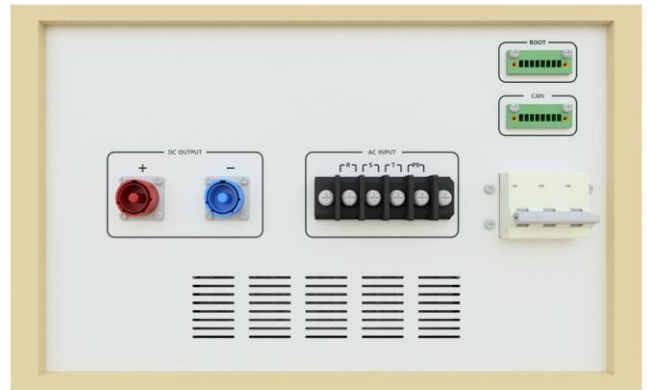



REAR

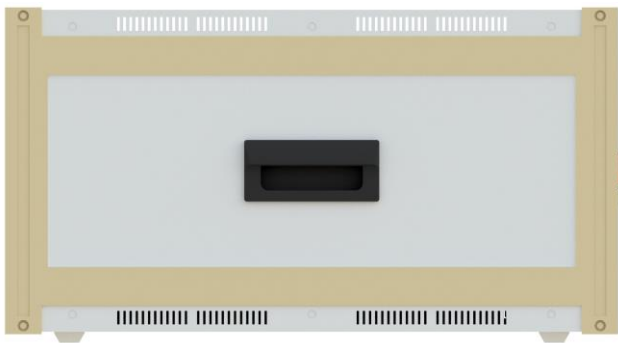

RIGHT

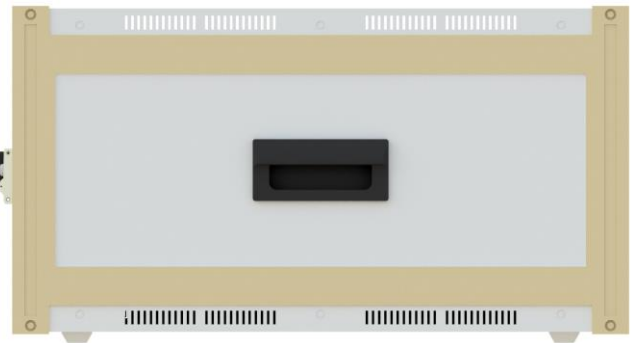

LEFT

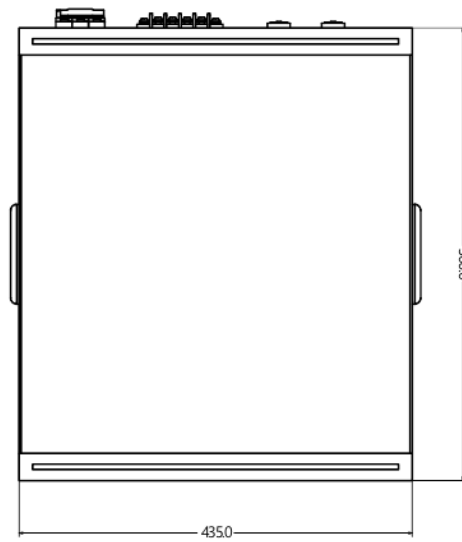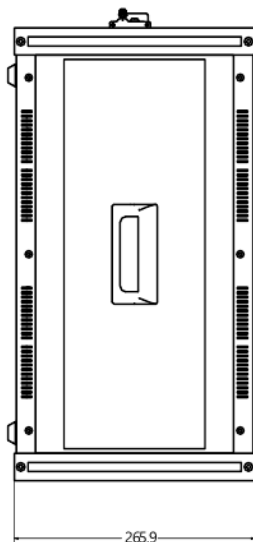



SIZE


 현대인버터솔루션(주)
Hyundai Inverter Solution Co., Ltd.

HYUNDAI INVERTER SOLUTION

(우44781) 울산광역시 남구 신여천로 35번길 46(여천동)

 070.4439.1567

 052.209.2697

 bluecat910227@naver.com